

City of Vancouver *Zoning and Development By-law*

Planning, Urban Design and Sustainability Department

453 West 12th Avenue, Vancouver, BC V5Y 1V4 | tel: 3-1-1, outside Vancouver 604.873.7000 | fax: 604.873.7100
website: vancouver.ca | email: planning@vancouver.ca

CD-1 (658)

2308 East 34th Avenue

By-law No. 11754

(Being a By-law to Amend By-law 3575, being the Zoning and Development By-law)

Effective March 7, 2017

1 Zoning District Plan Amendment

This By-law amends the Zoning District Plan attached as Schedule D to By-law No. 3575, and amends or substitutes the boundaries and districts shown on it, according to the amendments, substitutions, explanatory legends, notations, and references shown on the plan marginally numbered Z-705 (b) attached as Schedule A to this By-law, and incorporates Schedule A into Schedule D, to By-law No. 3575.

2 Uses

2.1 The description of the area shown within the heavy black outline on Schedule A is CD-1 (658).

2.2 Subject to Council approval of the form of development, to all conditions, guidelines and policies adopted by Council, and to the conditions set out in this By-law or in a development permit, the only uses permitted within CD-1 (658), and the only uses for which the Director of Planning or Development Permit Board will issue development permits are:

- (a) Cultural and Recreational Uses, limited to Artist Studio, Arts and Culture Indoor Event, Club, Fitness Centre;
- (b) Dwelling Uses, limited to Dwelling Units in conjunction with any of the uses listed in this By-law;
- (c) Institutional Uses, limited to Social Service Centre;
- (d) Manufacturing Uses, limited to Jewellery Manufacturing and Printing or Publishing;
- (e) Office Uses, limited to General Office;
- (f) Retail Uses, limited to Farmers’ Market, Public Bike Share, Retail Store, and Secondhand Store;
- (g) Service Uses, limited to Barber Shop or Beauty Salon, Beauty and Wellness Centre, Catering Establishment, Laundromat or Dry Cleaning Establishment, Photofinishing or Photography Studio, Print Shop, Repair Shop – Class B, Restaurant – Class 1; and
- (h) Accessory Uses customarily ancillary to the uses listed in this section 2.2.

3 Floor area and density

3.1 Computation of floor space ratio must assume that the site consists of 338.9 m², being the site size at the time of the application for the rezoning evidenced by this Bylaw, prior to any deductions.

3.2 The floor space ratio for all uses must not exceed 1.35.


3.3 Computation of floor area must include all floors, including earthen floor, above and below ground level, having a minimum ceiling height of 1.2 m, measured to the extreme outer limits of the building.

3.4 Computation of floor area must exclude:

- (a) open residential balconies or sundecks and any other appurtenances, which in the opinion of the Director of Planning, are similar to the foregoing, except that the total area of all exclusions must not exceed 8% of permitted floor area;
- (b) patios and roof gardens, if the Director of Planning first approves the design of sunroofs and walls;
- (c) where floors are used for off-street parking and loading, the taking on or discharging of passengers, bicycle storage, heating and mechanical equipment, or uses, which in the opinion of the Director of Planning are similar to the foregoing, those floors or portions thereof so used, which are at or below base surface, except that the minimum exclusion for a parking space must not exceed 7.3 m in length; and
- (d) all residential storage area above or below base surface, except that if the residential storage area above base surface exceeds 3.7 m² per dwelling unit, there will be no exclusion for any of the residential storage area above base surface for that unit.

- 3.5 Computation of floor area may exclude amenity areas, except that the total exclusion for amenity areas must not exceed 10% of the permitted floor area.
- 3.6 The use of floor area excluded under sections 3.4 and 3.5 must not include any purpose other than that which justified the exclusion.
- 4 Building height
Building height, measured from base surface, must not exceed 10.3 m.
- 5 Horizontal angle of daylight
- 5.1 Each habitable room must have at least one window on an exterior wall of a building.
- 5.2 The location of each such exterior window must allow a plane or planes extending from the window and formed by an angle of 50 degrees, or two angles with a sum of 70 degrees, to encounter no obstruction over a distance of 24.0 m.
- 5.3 Measurement of the plane or planes referred to in section 5.2 must be horizontally from the centre of the bottom of each window.
- 5.4 The Director of Planning or Development Permit Board may relax the horizontal angle of daylight requirement, if:
- (a) the Director of Planning or Development Permit Board first considers all the applicable policies and guidelines adopted by Council; and
 - (b) the minimum distance of unobstructed view is not less than 3.7 m.
- 5.5 An obstruction referred to in section 5.2 means:
- (a) any part of the same building including permitted projections; or
 - (b) the largest building permitted under the zoning on any site adjoining CD-1 (658).
- 5.6 A habitable room referred to in section 5.1 does not include:
- (a) a bathroom; or
 - (b) a kitchen whose floor area is the lesser of:
 - (i) 10% or less of the total floor area of the dwelling unit, or
 - (ii) 9.3 m².
- 6 Severability
A decision by a court that any part of this By-law is illegal, void, or unenforceable severs that part from this By-law, and is not to affect the balance of this By-law.
- 7 Force and effect
This By-law is to come into force and take effect on the date of its enactment.

ENACTED by Council this 7th day of March, 2017.

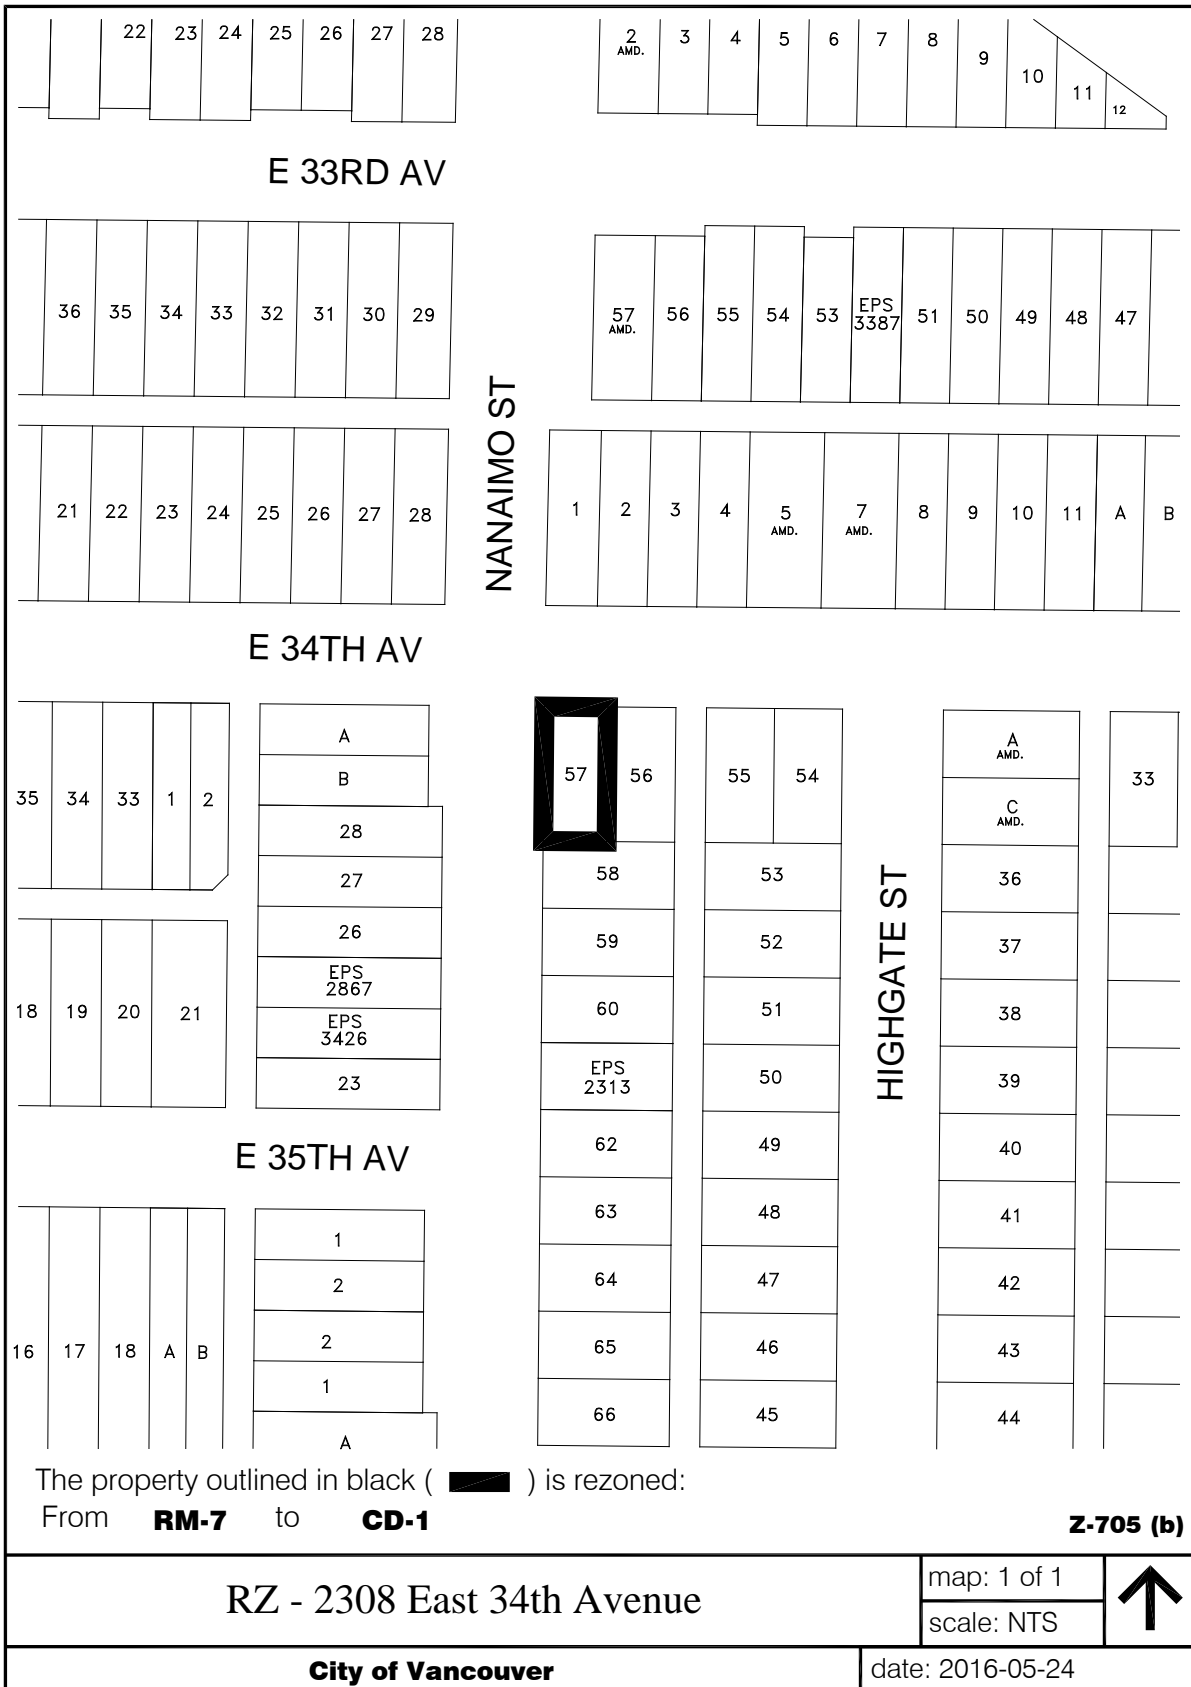

The property outlined in black () is rezoned:
From **RM-7** to **CD-1**

Z-705 (b)

RZ - 2308 East 34th Avenue

map: 1 of 1
scale: NTS



City of Vancouver

date: 2016-05-24